


NEW...



Wall Mount Mini Packaged System

Cooling Only & Heat Pump: Self-Contained, No Ref. Piping

- * 2 Holes & 1 Wall Mount, The Only One on the Rock
- * 2 Men & 1 Hour Installation, A Piece of Cake

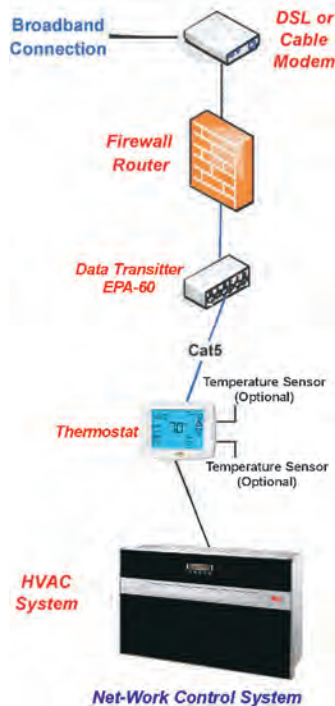

Control Options:



Remote Controller



Wall Mount Thermostat



Phone-AC/HP Controller
(Call to Control from Anywhere)



Soft Touch Control

YMGI, A Comfort Maker, A Joy Companion, A Satisfaction Guarantor...

APPLICATION EXAMPLES:

- * HIGH-RISE BUILDING
- * HOTELS
- * HOMES
- * SUNROOMS
- * CONDOS
- * RESORTS
- * FACTORIES
- * NURSING ROOMS
- * APARTMENTS
- * OFFICES
- * RESTAURANTS
- * MOBILE HOMES

FEATURES:

- * 2-HOLE & 1 WALL MOUNT: ROCK & ROLL
- * SELF-CONTAINED
- * DIGITAL DISPLAY
- * WIDE SCREEN WITH STYLISH LOOKING
- * SOFT TOUCH AND/OR REMOTE CONTROL
- * QUICK COOLING AND HEATING
- * INDEPENDENT DEHUMIDIFICATION
- * ACTIVE / INTELLIGENT DEFROSTING
- * WASHABLE FILTER
- * CONDENSATE-NATURAL AND PUMP-LIFT
- * 24-HOUR TIMER
- * MEMORIES
- * SLEEP MODE
- * PRE-CHARGED SEALED SYSTEM
- * OVERCURRENT & THERMAL PROTECTION
- * NOISE ABSORPTION MATERIAL
- * THOROUGHLY TESTED
- * PROVEN RELIABILITIES
- * OPTIMIZED SYSTEM DESIGN
- * WORLD-CLASS COMPRESSOR
- * ENHANCED COPPER/COIL
- * SUPER HIGH EFFICIENCY
- * USER-FRIENDLY
- * ENVIRONMENT-FRIENDLY
- * VERY EASY INSTALLATION
- * VERY EASY OPERATION
- * VERY QUIET OPERATION

SPARE PARTS AND ACCESSORIES:

- * HOSE-INTAKE
- * HOSE-EXHAUST
- * BIRDPROOF GRILLE
- * CONTROL BOARDS/COMPRESSORS
- * FILTER-STANDARD WASHABLE
- * FILTER-HIGH EFFICIENCY
- * MOUNTING BACKET
- * 1:1 MOUNTING HOLES DRILLING TEMPLATE
- * REMOTE CONTROLLER
- * PHONE CONTROLLER
- * THERMOSTAT
- * FRONT PANEL (SCREEN)

YMGI Group is the Sole Owner & User of YMGI Brand. Any Infringement Is to Be Prohibited and Prosecuted. Reporting or Assisting to Stop Any Infringement is to Be Rewarded.

YMGI is Solely the Trademark and Property of YMGI Group. Others Are Not Authorized to Use YMGI Brand.

Proudly Designed and Manufactured and Distributed and Marketed by YMGI Group LLC. No Other Persons or Companies in the World, Including China, USA and Canada, Are Authorized to Use YMGI Brand. Reporting or Assisting to Stop Any Infringement is to Be Rewarded.



OPTIONS AT MANUFACTURE:

- * Front Panel of Different Style
- * LCDI Cord
- * Low Ambient Control
- * Standard Thermostat Control



Style: 01



Style: 02

MODEL NO.			WMMS-09K-31A(P4)	WMMS-12K-31A(P4)	WMMS-09K-32A(P4)	WMMS-12K-32A(P4)	WMMS-09K-34A(P4)	WMMS-12K-34A(P4)	WMMS-09K-34B(P4)	WMMS-12K-34B(P4)
THERMAL MODE			AC ONLY		Heat Pump		Heat Pump + Aux. Heater		HP + Back-Up Heater	
COOLING CAPACITY	RATED	BTU/H	9000	11800	9000	11800	9000	11800	9000	11800
HEATING CAPACITY	RATED	BTU/H	9200	12000	9200	12000	9200	12000	9200	12000
ELECTRIC HEATER	RATED	WATTS	N/A	N/A	N/A	N/A	600	600	2500	3400
DEHUMIDIFICATION	RATED	PTS./DAY	42.2	48.6	42.2	48.6	42.2	48.6	42.2	48.6
SEER	RATED	BTU/H.W	13	13	13	13	13	13	13	13
HSPF	RATED	BTU/H.W	8.1	8.0	8.1	8.0	8.1	8.0	8.1	8.0
SOUND LEVEL (POWER)	INDOOR/OUTDOOR	dB(a)	36	38	36	38	36	38	36	38
REFRIGERANT	PRE-CHARGED	YES	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
INPUT POWER SOURCE	INDOOR & OUTDOOR		A: 115/1/60 F: 220/1/50						B: 208-230/1/60 F: 220/1/50	
POWER CONSUMPTION	COOLING	WATTS	960	1130	960	1130	960	1130	960	1130
	HEATING	WATTS	920	1095	920	1095	920	1095	920	1095
TOTAL CURRENT	COOLING	AMP	8.9	9.8	8.9	9.8	8.9	9.8	4.5	4.9
	HEATING	AMP	N/A	N/A	8.0	9.5	8.0+5.0	9.5+5.0	4 / 10.8	4.7 / 14.8
MCA	FOR WIRE SIZING	AMP	11	12	11	12	16	18	13.5	18.5
MINIMUM WIRING SIZE	LENGTH OF LESS THAN 35 FT	AWG	14				14			
HVAC CIRCUIT BREAKER	FOR FUSE SIZING	AMP	20	20	20	20	25	30	15	20
INDOOR FAN MOTOR	FAN	TYPE	CROSS FLOW							
		CFM	265	300	265	300	265	300	265	300
	MOTOR	RATED WATTS	14-15	14-15	14-15	14-15	14-15	14-15	14-15	14-15
MAX. SPEED		1350	1350	1350	1350	1350	1350	1350	1350	
OUTDOOR FAN MOTOR	FAN	TYPE	CENTRIFUGAL							
		CFM	1175	1175	1175	1175	1175	1175	1175	1175
	MOTOR	RATED AMP	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50
STYLE		PSC								
COMPRESSOR	HERMETIC	BRAND	TOSHIBA OR PANASONIC							
CONTROL	SOFT TOUCH	ON PANEL	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	REMOTE CONTROLLER	INCLUDED	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CONNECTIONS	DRAINAGE	DRAIN PIPE	1/2"ID 3/4"OD							
	WIRES	OPEN STRIPPED END	3 Ft.	3 Ft.	3 Ft.	3 Ft.	3 Ft.	3 Ft.	3 Ft.	3 Ft.
		LCD I	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL
INSTALLATION	LIMIT-HIGH (TOP TO GROUND)	FT	8	8	8	8	8	8	8	8
	LIMIT-LOW (TOP TO GROUND)	FT	2	2	2	2	2	2	2	2
INSTALLATION KIT	INCLUDED	BOXED	WMMP-00-INST							
BRACKET MOUNTING SCALE	INCLUDED	1:1	Yes							
WORKING AMBIENT TEMPERATION RANGES (AC / HP)	F		15-99 / NA		15 to 99 / 15 to 68		15 to 99 / 0 to 68		15 to 99 / -10 to 68	
WEIGHT	INET	LBs	104	106	104	106	104	106	104	106
	GROSS	LBs	112	118	112	118	112	118	112	118
DIMENSION WxHxD	UNIT	INCH	37 x 24 x 10							
	BOX	INCH	39 x 26 x 12							
LOADING CAPACITY	20/40/40HQ	SETS	130/260/312							

NOTES:

- 1) Electric data above is based upon 60HZ. For data of 50 HZ, look up in the nameplate on the unit.
- 2) Unit Appearance and Specifications Are Subject to Change for Continuous Improvement without Any Prior Notice.

YMGI Group LLC
 POB 1559, O'Fallon, MO 63366, USA
 Tel: 1-866-833-3138
 Fax: 1-866-377-3355
 Web Sites: www.ymgigroup.com
 Email: info@ymgigroup.com

Rep. Or Distributor:

YMGI Group is the Sole Owner & User of YMGI Brand. Any Infringement Is to Be Prohibited and Prosecuted. Reporting or Assisting to Stop Any Infringement is to Be Rewarded.

Copyright of YMGI Group LLC. 2009.07

Unit Appearance and Specifications Are Subject to Change for Continuous Improvement without Any Prior Notice.

Proudly Designed and Manufactured and Distributed and Marketed by YMGI Group LLC. No Other Persons or Companies in the World, Including China, USA and Canada, Are Authorized to Use YMGI Brand. Reporting or Assisting to Stop Any Infringement is to Be Rewarded.